轻 型 货 架
Light duty shelving



Light duty Racking is a cost-effective, light duty bolted system, ideal for smaller or bulkier but lighter applications. It can carry up to 150kg per layer and is available at a fraction of the cost of Pallet racking. The construction and connections have the same advantages as mid and heavy duty Racking. Various storage levels are available from steel shelves or mesh desking to timber decking options.

轻型货架

轻型货架属于搁板货架的一种，适用于人工存取较轻的货物，并常常与料盒配合存放小件物品，因此它在所有仓储货架中的承载量是最小的。通常货架承载≤150kg/层，可以通过改变喷塑粉末或者铺设特殊橡胶板实现防静电功能，具有成本低、安全可靠、组装、拆卸简单的特点。可单独使用，也可自由拼接成各种排列方式。在地脚处增加万向轮机构甚至可以实现转运功能。

Light duty shelving · 轻型货架
Jiangsu Union Logistics System Engineering Co.,Ltd.

产品功能
Feature

1、货架立柱是由等边角钢双边冲孔制成，孔距离以50mm距离沿直线排列，立柱孔用来挂接层板之用；
2、货架钢层板采用冷轧钢板按所需尺寸四边折弯成型。
3、立柱与钢层板通过速扣卡销和三角型固定片连接与固定组成的货架。
4、货架各部件加工成型后经打磨、酸洗、磷化、烘干、环氧树脂粉末静电喷涂等工艺处理后组装成品。生产出的货架成品表面光洁、美观；层板可上下任意调节，拆装方便。





轻型货架常用规格 Typical product			
深度 Depth(mm)	450	500	600
长度 Length(mm)	1200	1500	1800
高度 High(mm)	1500	1800	2000
每层载重(Kg/Layer)	50 - 180		
层高调节间距(mm)	50		

中 A 货 架
Mid-duty shelving A



中A货架造型美观、结构简单、装拆方便，连接形式为插接式连接，除顶层及底层不可调节外，层与层之间高度可按50mm的节距任意调节。采用优质冷轧钢板制造，表面用静电喷涂，防腐、防锈，坚固耐用。


Union Mid-duty shelving A also called long span shelving which is named for mid duty goods storage. It provides the best preconditions: flexible in operation, easily adjustable and easily configurable. It is particularly suitable for large volume, bulky goods and containers. Mid-duty shelving A has the loading capacity in 200-280kg which is widely used in supermarket, store, and other enterprises

Mid-duty shelving A · 中A货架
Jiangsu Union Logistics System Engineering Co.,Ltd.






中A货架常用规格 Typical product				
深度 Depth(mm)	450	500	600	800
长度 Length(mm)	1200	1500	1800	2000
高度 High(mm)	1500	1800	2000	2200
每层载重(Kg/Layer)	150 - 350			
层高调节间距(mm)	50			

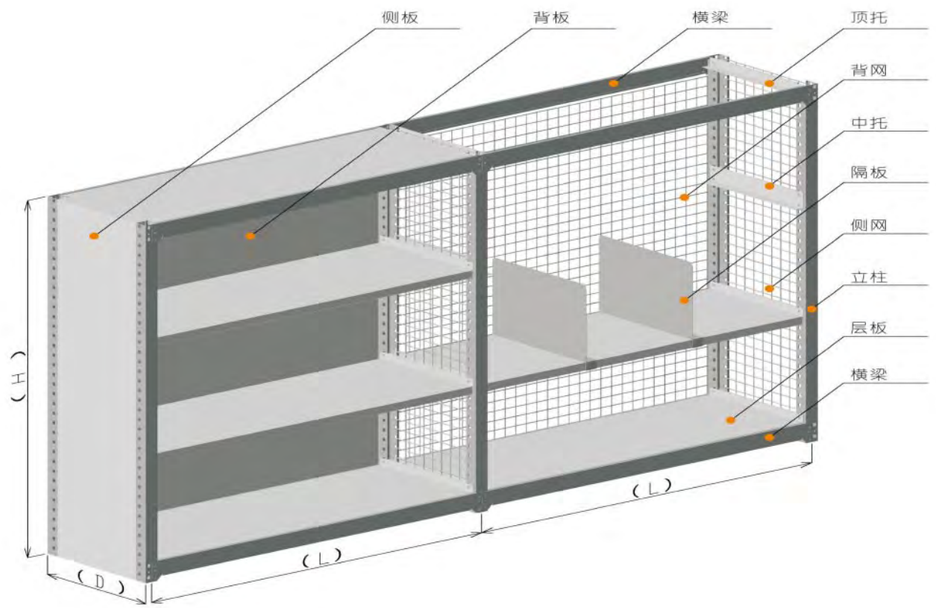

中 B 货 架
Mid-duty shelving B

中B货架同样是适用于人工存取货物的中型货架，相对于中A货架来说，立柱由横斜称挂接而成，层板改为宽度方向铺设，跨度小，承载能力比中A货架增大了一倍以上，由于其成本低、安全可靠、拆装简单的优点，广泛应用于各个行业

Mid duty shelving B is also used for hand-loading application. Compare with boltless shelving, its loading capacity is twice than mid duty shelving A. It is use for awkward or bulky loads, ideal for order picking or bulk storage; it can be designed for single, multi-tier or high rise applications. Itprovides the best preconditions: flexible in operation, easily adjustable and easily configurable, performs in various types of storage area.

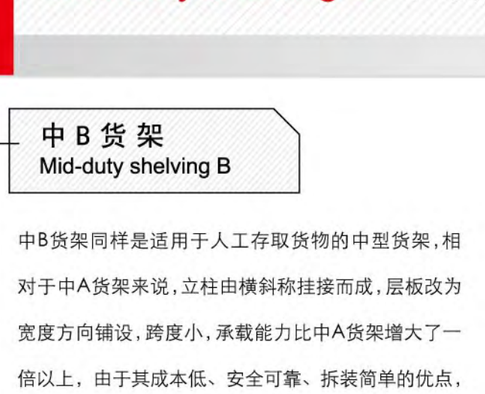





Mid-duty shelving B · 中B货架
Jiangsu Union Logistics System Engineering Co.,Ltd.



中B货架成本低、安全可靠、拆装简单的优点，广泛应用于各个行业

产品功能 Feature



1、Designed for storage of small parts in any environment from offices to industrial warehouses
2、Designed for medium and heavy load capacity
3、The standard finishing is epoxy powder coating (frames and shelves in RAL color)
4、Optionally the system can be delivered in galvanized finish
5、Design plan according to clients' requirements

中B货架

1、货架立柱是由冷轧钢板经专用冷弯成型机组滚轧成型，立柱正面冲双排孔，孔距离以50mm距离沿直线排列，立柱孔用来挂接横梁之用；两根立柱相对，通过横撑与斜撑连接两根立柱组装成货架的立柱片。

2、货架横梁采用“P”型管材，俗称“阶梯梁”，阶梯的高度与层板的高度相匹配。


3、货架钢层板采用冷轧钢板按所需尺寸四边折弯成型。


4、横梁与立柱片挂接组装成框架，铺设钢层板，至此一组完整的中型货架成型。

5、货架各部件加工成型后经打磨、酸洗、磷化、烘干、环氧树脂粉末静电喷涂等工艺处理后组装成品。生产出的货架成品表面光洁、美观；货架层可上下依50mm节距任意调节，拆装方便。

Mid-duty shelving B · 中B货架
Jiangsu Union Logistics System Engineering Co.,Ltd.

中B货架 Mid-duty shelving B

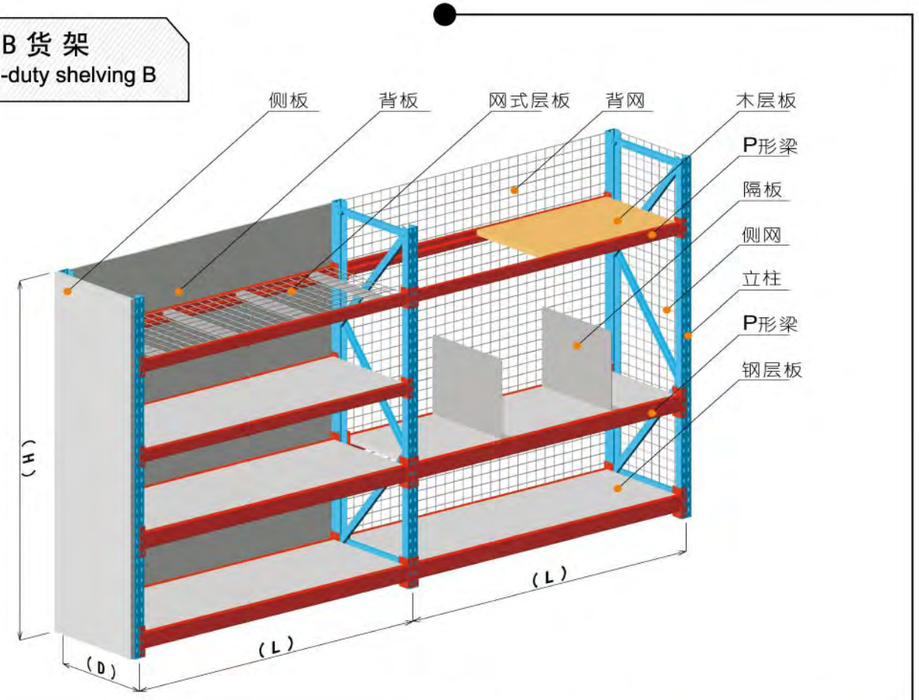

P形横梁截面	H×W(mm)
	50×30
	60×40
	80×50
	110×50

中B货架常用规格 Typical product

深度 Depth(mm)	450	500	600	800
长度 Length(mm)	1200	1500	1800	2000
高度 High(mm)	1800	2000	2200	2500
每层载重(Kg/Layer)	200 - 1000			
层高调节间距(mm)	50			